

*Special Price  
\$29.50 each  
Over 60% Discount off the  
List price  
Free Shipping on 10 or  
more per Shipment  
Credit Card payments take an  
additional 10%*

*" LIMITED SUPPLY "*

*USE PROMO CODE  
XTC0717*


## *Pressure Transducer of the Month XTC Series, 0/3000 psi*

### **XTC Transducer XTC-D-0/3000-4M-DI-81**

- 0.5 to 4.5 v output
- 10-30 VDC Supply
- 0/3000 psi range
- ¼" npt
- Integral Deustch Electrical Termination
- Pin A: Supply V+, Pin B: Common, Pin C: Signal (V)
- 1.5 x Full Scan Overload Pressure
- Ceramic Sensing Element

**Call Toll Free: 800-988-1276**


2810 Blue Ridge Blvd.  
PO Box 100  
West Union, SC 29696  
Ph: 864-638-5544  
www.pvssensors.com

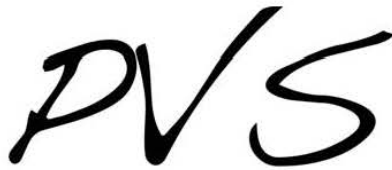

Sensors Inc.®



Sensing Element: Ceramic

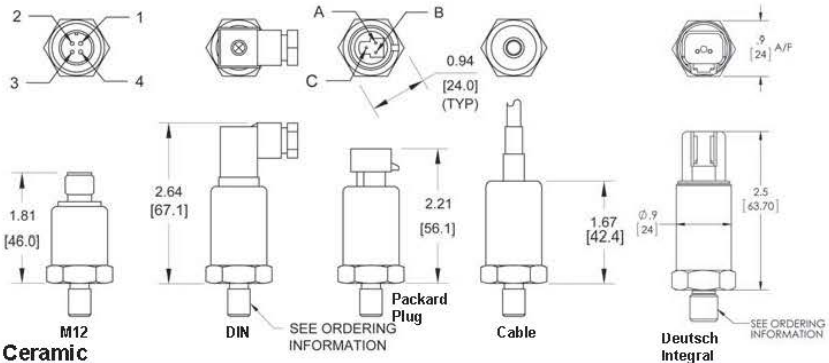

**Wiring Data Information**

DIN Connector PIN Function					Cable Connector WIRE Function					Deutsch 2 Pin Wiring			
Signal Output	Pin 1	Pin 2	Pin 3	Pin 4	Signal Output	RED	BLUE	YELLOW	BLACK	Signal Output	Pin 1	Pin 2	
mA	Supply V+	Output	N/A	N/A	mA	Supply V+	Output	N/A	N/A	mA	Supply V+	Output	
V	Supply V+	Common	Output	N/A	V	Supply V+	Output	N/A	Common	V	N/A	N/A	
M12 PIN Function					Packard Plug PIN/WIRE Function				Deutsch 3 Pin Wiring				
Signal Output	Pin 1	Pin 2	Pin 3	Pin 4	Signal Output	A/BLACK	B/RED	C/GREEN		Signal Output	Pin A	Pin B	Pin C
mA	Supply V+	N/A	Output	N/A	mA	Supply V+	N/A	Output		mA	N/A	N/A	N/A
V	Supply V+	N/A	Output	Common	V	Supply V+	Common	Output		V	V+	GND	Output

The XTC pressure transducers offer high quality, high stability, stainless steel compact design, ideal for the industrial environment. The transducers are widely used in air compressors, air conditioning and refrigeration equipment, automotive and hydraulic control.

**ELECTRICAL:**

Output: 4 - 20mA (2 wire)  
 0 - 5V, 0 - 10V, 0.5 - 4.5V,  
 1 - 5V (3 wire)  
 Supply: 12 - 30 VDC (2 wire), 5 VDC,  
 10 - 30 VDC (3 wire)

**PROTECTION:**

IP65 with DIN  
 IP67 with Packard Plug  
 IP69 Cable or M12X1, Integral Deutsch

**PRESSURE RANGE:**

0 - 8700 PSI (0 - 600 Bar)  
 For Packard Plug below 750  
 PSI See YTC Transducer

**OPERATE TEMPERATURE:**

-40° to 212°F (-40° to 100°C)

**STORAGE TEMPERATURE:**

-58° to 257°F (-50° to 125°C)

**COMPENSATION TEMPERATURE:**

14° to 176°F (-10° to 80°C)

**ACCURACY:**

± 0.5% (Full Scan)

**RESPONSE TIME:**

<10 milliseconds

**OVERLOAD PRESSURE:**

150% Full Scan

**INSULATION:**

>100m Ω@50V

**MATERIAL:**

Wetted Area: Ceramic  
 Body: 304 Stainless Steel

**MEDIUM COMPATIBILITY:**

Corrosive medium compatible with Cr18Ni9Ti,  
 and ceramic

**ORDERING INFORMATION**

XTC	- A	- 0/3000	- 4M	- HCM
Model	Type	Pressure Range	Connection	Terminals
XTC	A: 4 - 20mA (2 wire) B: 0 - 5V (3 wire) C: 0 - 10V (3 wire) D: 0.5 - 4.5V (3 wire) E: 1 - 5V (3 wire)	Specify Pressure Range Required  <i>Note: Standard Ranges</i> 0/100 PSI, 0/300 PSI, 0/600 PSI, 0/1500 PSI, 0/3000 PSI, 0/5000 PSI, 0/6000 PSI, 0/8700 PSI  <b>Consult Factory for Other Ranges</b>	4M - 1/4 NPT 4S - 7/16 X 20 SAE MALE 2G - 1/8 BSPP* 4G - 1/4 BSPP* 4GFS - 1/4 BSPP* w/O-ring Face Seal  *Non Standard	PP - Packard Plug M - M12X1 C - 39" (1 Meter) Cable (Std) H - DIN 43650C Male Half Only HCM - DIN 43650C Mini DIN HCM A - DIN Light NO/NC 110V HCM B - DIN Light NO/NC 12VDC HCM C - DIN Light NO/NC 24VDC HCM.D - Indicating Light Green/Red DI - Deutsch Integral